


Compact In-Desk Connectivity with 1x Mains (North America/ Multi-Standard), USB Charging, HDMI & USB-C Passthrough

IDB-200-NA | IDB-200-MS

WyreStorm

Specification Sheet

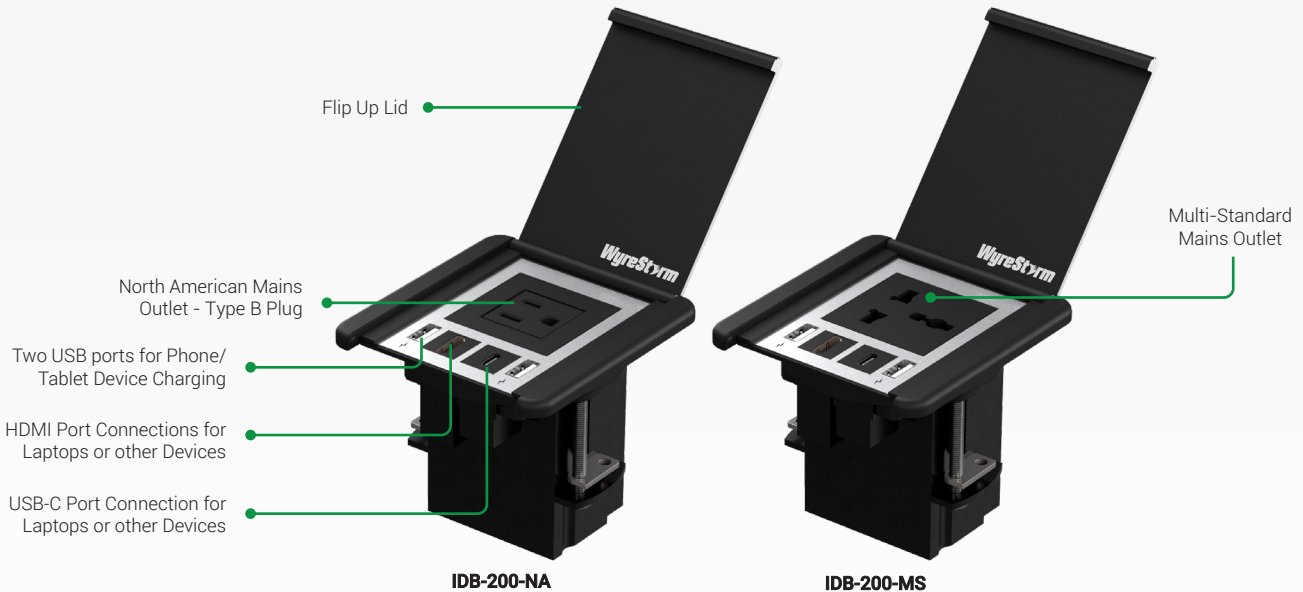

4K HDR **HDMI** **HDCP 2.2**

WyreStorm - Powerful. Reliable. Simple.

Introduction

The IDB series in-desk connectivity products are simple to use solutions for corporate or education applications. Easy to install into a desk or table, the IDB-200 offers the essential connectivity for your meeting, lecture, or classroom. The IDB-200 features a flip-top lid to protect and help blend into the desk when not in use. The IDB-200-NA includes a North American Type B mains outlet, whereas the IDB-200-MS includes a multi-standard outlet for the UK and other European countries.

Key Features

- Multiple connection options including: 1x Mains, USB Charging, HDMI & USB-C Passthrough
- HDMI and USB-C support up to 4K UHD video passthrough
- 2 x USB Type A charging ports for connecting mobile devices such as smartphones or tablets
- Compact design allows for discrete installation into any desk or table
- Flip-top lid for protection of ports and discrete appearance when not in use
- Pair with a WyreStorm presentation switch to build your meeting space solution, such as the SW-740-TX, Apollo series and more!
- Use the IDB-CBL-SPINE to neatly organize cables under the desk
- Optional Weiland to UK & Schuko 2-meter cables available for 'MS' models (IDB-PWR-UK & IDB-PWR-SCH)

In the Box

1x IDB-200 NA or IDB-200-MS

Specifications

	IDB-200-NA	IDB-200-MS
Audio and Video		
Inputs	1 x Mains outlet (North American Type B) 1 x USB-C 1 x HDMI 2 x USB Type A Charging Ports	1 x Mains outlet (Multi-standard) 1 x USB-C 2 x HDMI 2 x USB Type A Charging Ports
Video Resolutions (Max)	3840x2160 @60Hz 4:4:4 8bit	3840x2160 @60Hz 4:4:4 8bit
Power		
Mains Connection	Voltage: 100-250VAC Current: Max: 16A Frequency: 50-60Hz Integrated 3 meter mains cable (Type B plug) Total power of simultaneously connected devices must not exceed 3.6kW	Voltage: 100-250VAC Current: Max 16A Frequency: 50-60Hz Integrated 40cm Weiland connector (EPN 1114) Total power of simultaneously connected devices must not exceed 3.6kW
USB Charging	5v 2.4a per port	
Environmental		
Operating Temperature	0 to +45°C (32 to + 113 °F), 10% to 90%, non-condensing	
Dimensions and Weight		
Length x Width x Height	Top surface: 85mm x 85mm Under table depth: 80mm Under table width: 79.8mm Can be mounted in surfaces between 12-47mm thick	
Weight		
Regulatory		
Safety and Emission	CE FCC RoHS RCM EAC	

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.