



\*Alle Abbildungen können von der Realität abweichen

## IP-geschützter Outdoor Display 22XE1J



-30°C



50°C

Für extreme Betriebstemperaturen geeignet

# Vielseitig nutzbarer Outdoor Display (21.5")



1,500 nits  
Hohe Helligkeit



IP56 Staub-/  
Wasserschutz



Bildschirm  
-größe (21.5")



Langhaltende  
Ausdauer



webOS  
Smart Platform




Web-basierte  
Verwaltungslösung

	22XE1J
Bildschirmgröße	21.5" IPS M+ (WRGB)
Auflösung	1,920 × 1,080 (FHD)
Helligkeit	1,500 nits (Typ. w/Glass)
Hoch- / Querformat	Ja / YJa
Abmessungen / Gewicht	557.3 × 319.8 × 65 mm / 10 kg
Funktionen	IP56 Wasser- & Wetterfest, Auto Helligkeitssensor, Temperatursensor, Integriertes WLAN, Control Manager

## SPEZIFIKATIONEN

## 22XE1J

Panel	Bildschirmgröße	21.5"
	Panel Technologie	AHVA (IPS)
	Auflösung	1,920 x 1,080 (FHD)
	Helligkeit	1,500 nit (Typ, w/ Glass)
	Kontrast	1,000 : 1 (Typ.)
	Dynamischer Kontrast	800,000 : 1
	Farbraum	NTSC 72%
	Blickwinkel (H x V)	89 x 89
	Farbtiefe	8 bit, 16.7 Million Colors
	Reaktionszeit	25 ms (G to G)
	Oberflächenfilter (Haze)	Anti Glare, 3 H (Haze 25%)
	Betriebszeit (Stunden / Tage)	24 / 7
	Hoch- / Querformat	Ja / Ja
	QWP (Quarter Wave Plate)	Ja (Apply on Glass)
Verbindungen	Input	HDMI (HDCP 1.4), RS-232C, RJ45 (LAN), USB 2.0 (Type A)
	Output	External Speaker Out (L / R, 10 W + 10 W)
Mechanische Eigenschaften	Rahmenabmessungen	38.3 mm (R / L), 24.0 mm (T / B)
	Gewicht	8.3 kg
	Verpackungsgewicht inkl.	10 kg
	Bildschirmabmessung (L x H x T)	557.3 x 319.8 x 65 mm
	VESA™ Standard Mount Interface	100 x 100
	Schutzglass	Tiefe (2 mm)
Hauptfunktionen	Internal Memory (1.6 GB), Wi-Fi (Built-in), Sensor (Temperature Sensor, Auto Brightness Sensor, Humidity Sensor, Acceleration (Gyro) Sensor), Power Indicator, FAN, webOS 4.1, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), Sync Mode (Local Network Sync), Video Tag (4, Max One HDMI Input), Play via URL, Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Setting Data Cloning, SNMP, ISM Method, Status Mailing, Control Manager, Power (Smart Energy Saving, PM Mode, Wake on LAN, Network Ready), Beacon, HDMI-CEC <sup>1</sup> , SI Server Setting, webRTC, ProJdiom	
Umgebungsbedingungen	Operation Temperature	-30°C to 50°C
	Operation Humidity	5% to 100%
Strom	Power Supply	AC 100-240 V~, 50/60 Hz
	Power Type	Built-in Power
Stromverbrauch	Typ. / Max.	85 W / 115 W
	BTU (British Thermal Unit)	290 (Typ.), 393 (Max.)
Sound	Lautsprecher	No
Zertifizierung	Sicherheit	CB / NRTL
	EMC	FCC Klasse "A" / CE / KC / VCCI
	ErP / Energy Star	Ja / Nein
Software Kompatibilität	SuperSign CMS, SuperSign Control / Control+, LG ConnectedCare <sup>2)</sup>	
Zubehör	Basic	Fernbedienung, Stromkabel, Handbuch (EIG, IG), RS-232C Gender
Besonderheit	IP Rating (IP56), Direct Sunlight	

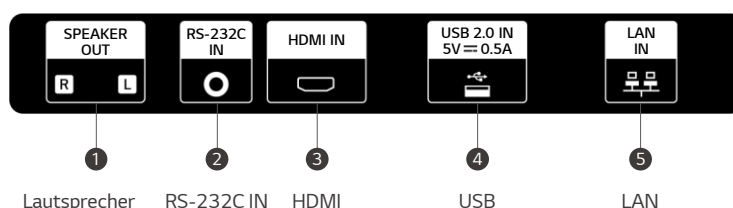

\* Spezifikationen können abweichen



Download  
LG C-Display+  
Mobile App  
Google Play Store

www.lg.com/global/business/information-display  
www.youtube.com/c/LGCommercialDisplay  
www.facebook.com/LGInformationDisplay  
www.linkedin.com/company/LGinformationdisplay  
twitter.com/LG\_ID\_HQ

LG may make changes to specifications and product descriptions without notice. Copyright © 2021 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.