

Evolution Not Revolution

The Just Add Power 2GΩ/3G+ Transmitter combines the enhanced audio and feature-set of the 3G system with the **maximum 1080p resolution** of 2G devices.

2GΩ/3G+ devices can be installed in 2G and 3G systems.

In 2G systems, a 2GΩ/3G+ Transmitter is a direct replacement to a 2G+ Transmitter and functions just like a 2G+ device.

In 3G systems, 2GΩ/3G+ Transmitters provide a lower-cost solution for sources that output **1080p resolution or lower**.




Build a future-proof infrastructure. Just Add Power 2GΩ/3G+ integrates seamlessly with both 2G and 3G. Build a 2GΩ system with 4K expansion plans or mix-and-match with 2GΩ on 1080p sources and 3G on 4K sources!



Features	
Maximum 1080p video with HDCP 1.4	
All lossless audio supported – including Dolby Atmos®	
Control endpoints with RS232 & IR*	
Image Play – Push, Pull & Pop	
Integrated Scaler on Receiver	
CEC control	
HDMI pass-through	
Stereo audio output with 170ms audio delay	
USB 2.0	

Compliance	HDCP 1.4 & RoHS/FCC/CE
Operating Temp	0-60 °C / 32-140 °F
Supported Resolutions	Up to 1920x1200 (interlaced & progressive)
Dimensions & Weight	158 x 30 x 127 mm 6.2" x 1.2" x 5.0" 0.36 kg / 0.8 lb
Ports	Gigabit Ethernet HDMI In HDMI Out 3.5mm stereo out 3.5mm RS232 w/ null modem Micro-USB
Bandwidth	180-500 Mbps
Power Supply (not included)	~4.7 – 23V 5.5mm/2.1mm, Positive tip
PoE	10 watts maximum

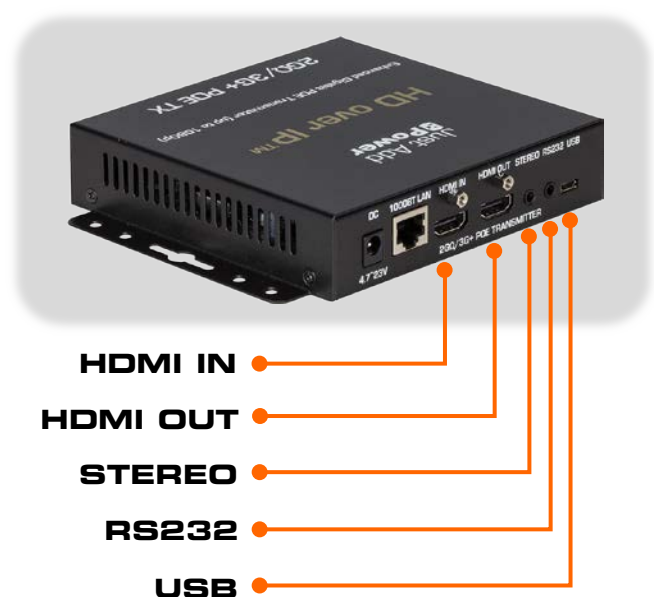

HDMI IN

HDMI OUT

STEREO

RS232

USB