


Flip Up In-Desk Connectivity with 1x Mains (North America/Multi-Standard), USB Charging, 2x HDMI, USB-C & RJ-45 Passthrough

IDB-400-NA | IDB-400-MS

WyreStorm®

Specification Sheet

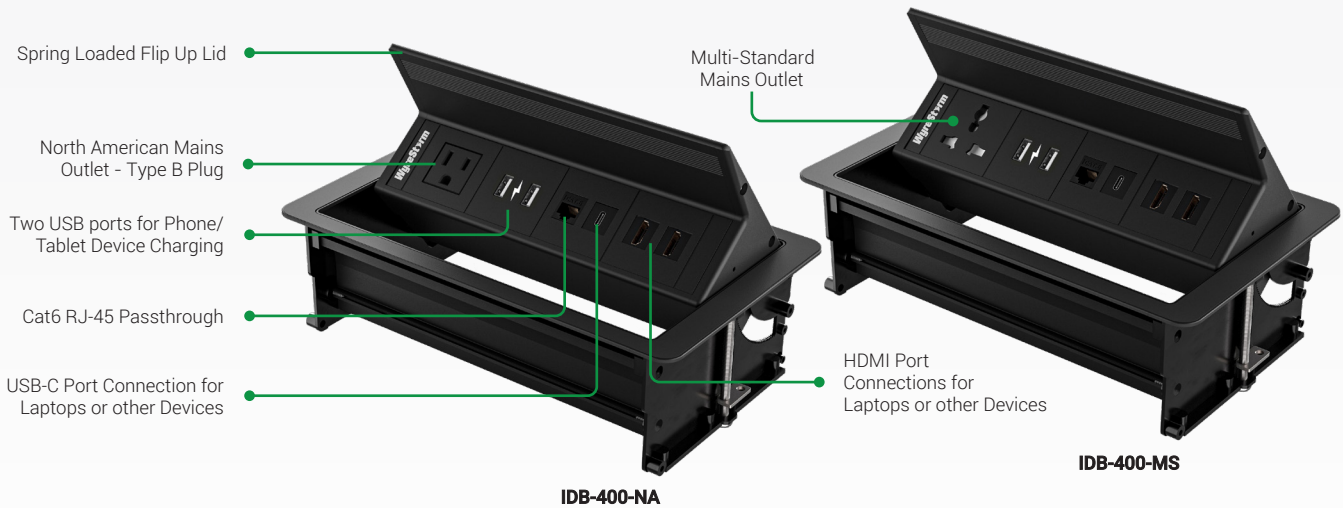

4K HDR HDMI HDCP 2.2

WyreStorm - Powerful. Reliable. Simple.

Introduction

The IDB series in-desk connectivity products are simple to use solutions for corporate or education applications. Easy to install into a desk or table, the IDB-400 offers a broad range of connectivity for your meeting, lecture, or classroom. The spring-loaded flip up design allows you to simply push on the lid to expose the ports. The IDB-400-NA includes a North American Type B mains outlet, whereas the IDB-400-MS includes a multi-standard outlet for the UK and other European countries.

Key Features

- Multiple connection options including: 1x Mains, USB Charging, 2 x HDMI, USB-C and RJ-45 passthrough
- HDMI and USB-C connections support up to 4K UHD video passthrough
- 2x USB Type A charging ports for connecting mobile devices such as smartphones or tablets
- Spring-loaded flip up design allows you to simply push on the lid to expose the ports
- Pair with a WyreStorm presentation switch to build your meeting space solution, such as the SW-740-TX, Apollo series and more!
- Use the IDB-CBL-SPINE to neatly organize cables under the desk
- Optional Weiland to UK & Schuko 2 meter cables available for 'MS' models (IDB-PWR-UK & IDB-PWR-SCH)

In the Box

1x IDB-400 NA or IDB-400-MS

Specifications

| | IDB-400-NA | IDB-400-MS |
|--------------------------------|---|--|
| Audio and Video | | |
| Inputs | 1 x Mains outlet (North American Type B) 1 x USB-C 2 x HDMI 1 x RJ-45 2 x USB Type A Charging Ports | 1 x Mains outlet (Multi-standard) 1 x USB-C 2 x HDMI 1 x RJ-45 2 x USB Type A Charging Ports |
| Video Resolutions (Max) | 3840x2160 @60Hz 4:4:4 8bit | 3840x2160 @60Hz 4:4:4 8bit |
| Power | | |
| Mains Connection | Voltage: 100-250VAC Current: Max: 16A Frequency: 50-60Hz Integrated 3 meter mains cable (Type B plug) Total power of simultaneously connected devices must not exceed 3.6kW | Voltage: 100-250VAC Current: Max 16A Frequency: 50-60Hz Integrated 40cm Weiland connector (EPN 1114) Total power of simultaneously connected devices must not exceed 3.6kW |
| USB Charging | 5v 2.4a per port | |
| Environmental | | |
| Operating Temperature | 0 to +45°C (32 to + 113 °F), 10% to 90%, non-condensing | |
| Dimensions and Weight | | |
| Length x Width x Height | Top surface: 151.3mm x 256mm Under table depth: 76.3mm Under table width: 243mm Can be mounted in surfaces between 12-60mm thick. | |
| Weight | | |
| Regulatory | | |
| Safety and Emission | CE FCC RoHS RCM EAC | |

Note: WyreStorm reserves the right to change product specification, appearance or dimensions of this product at any time without prior notice.